


Elastomer O-Ring Seal

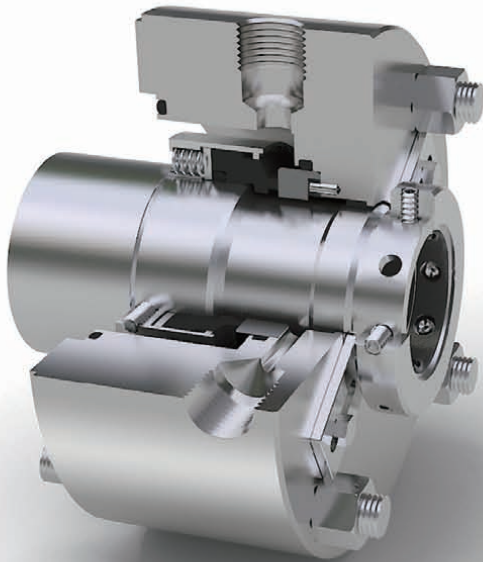

Type H126

Pump Seal

- For secondary seal

Applications

- Industrial applications involved in the processing of VOCs and similar hazardous products.
- Lubrication liquids, aqueous solutions, chemicals, light hydrocarbons, and some acid etc.

Design Features

- Designed accord with API 682.

Performance Capabilities

- Temperature: -40°C to 260°C (Depends on the material of O-Ring)
- Pressure: $\leq 6.8\text{MPa}$
- Speed: $\leq 25\text{m/s}$
- Shaft Dia.: $\leq 127\text{mm}$

Pressure Rating

