


## Double Dry Gas Seal

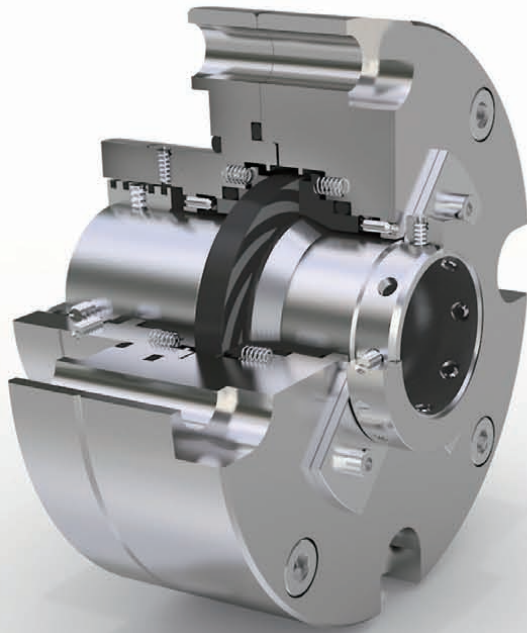

# Type H282B

## Pump Dry Gas Seal

- For poisonous medium
- For solid particle medium

### Applications

- Compact design, for use in limited seal chamber and use in medium contained little solid particles (contain up to 5%), e.g., for use in poisonous, combustible and explosive BDO and horizontal centrifugal pump etc.

### Design Features

- For use in Various media.
- Operate no-contacting.
- Simplified gas barrier support system.
- Low power consumption.
- Cartridge structure, easy to install and remove.

### Performance Capabilities

- Temperature:  $-60\sim 200\text{ }^{\circ}\text{C}$
- Pressure: vacuum $\sim 1.5\text{MPa}$
- Speed: 500 $\sim 3000\text{rpm}$
- Shaft Dia.:  $\leq 110\text{mm}$

### Pressure Rating

